

---

## PDV-500T Pneumatic Drain Valve

---

### Zero air loss saves energy.

The PDV-500T is a heavy duty zero loss pneumatic drain valve that saves energy and will not clog. With no electricity need for operation, the PDV-500T is well suited for remote or portable applications and is safe to operate in hazardous areas.

The PDV-500T activates on demand, only when condensate is present and releases no valuable compressed air. A stainless steel float rises and moves a magnet over a pilot valve housing. When the float reaches a preset level, the pilot valve releases control air to open the ball valve allowing the captured liquid to drain. The liquid in the vessel drops, but does not fall far enough to lose any compressed air.

### The PDV-500T is ideal for draining:

- Air receivers
- Moisture separators
- Drop legs
- Coalescing filters
- Deliquescent and refrigerated dryers


**F E A T U R E S**

**Zero air loss**

**Full flow ball valve**

**Visible liquid level to verify performance**

**Optional stainless steel ball valve**

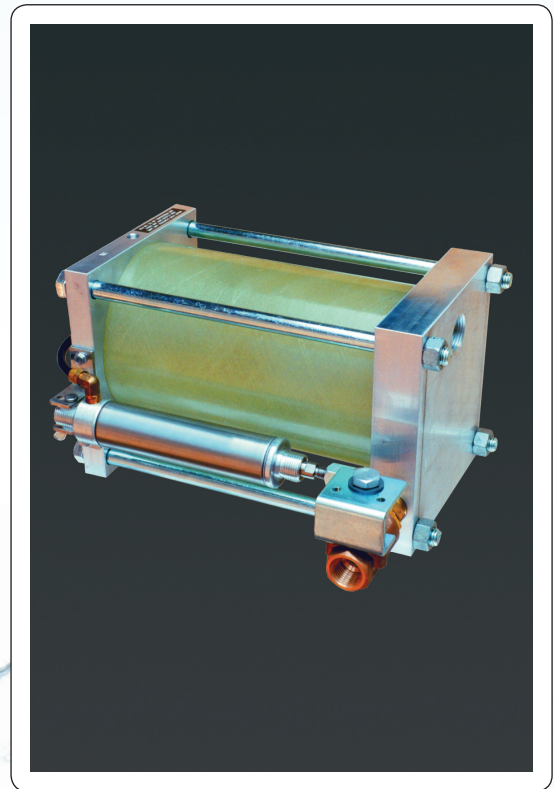

---

### BENEFITS OF THE PDV SERIES

---

Does not clog // Easy to monitor

[vanairsystems.com](http://vanairsystems.com)

## SPECIFICATIONS



- Inlets: (2) 3/4" NPT
- Outlet: 1/2"
- Instrument air: 80 to 130 PSI
- Instrument air connection: 1/8" NPT
- Operating pressure: 0 to 250 PSI
- Operating temperature: 32 to 180° F
- Weight: 16 lbs.
- Test button
- Translucent reservoir
- Brass ball valve (stainless optional)
- Stainless steel float
- Stainless steel seat
- Viton seal

## OPTIONAL EQUIPMENT

- Stainless steel ball valve
- Heater
- 750 PSIG design pressure

## DIMENSIONS & SPECIFICATIONS

Model No.	A		B		C		Inlet Conn.	Outlet Conn.	Valve Orifice	Working Pressure Range PSIG / BARG	Weight	
	in	cm	in	cm	in	cm					lbs	kg
PDV-500T	6 1/2	16.5	13 5/8	34.6	9.1	23.1	3/4" NPT	1/2" NPT	Brass	250 / 17.2	16	7.3
PDV-500T-SS	6 1/2	16.5	13 5/8	34.6	9.1	23.1	3/4" NPT	1/2" NPT	Stainless	250 / 17.2	16	7.3

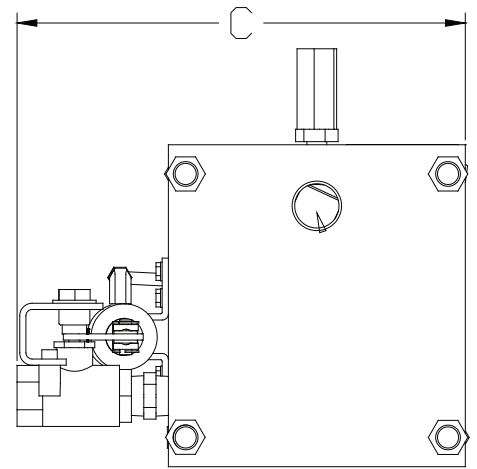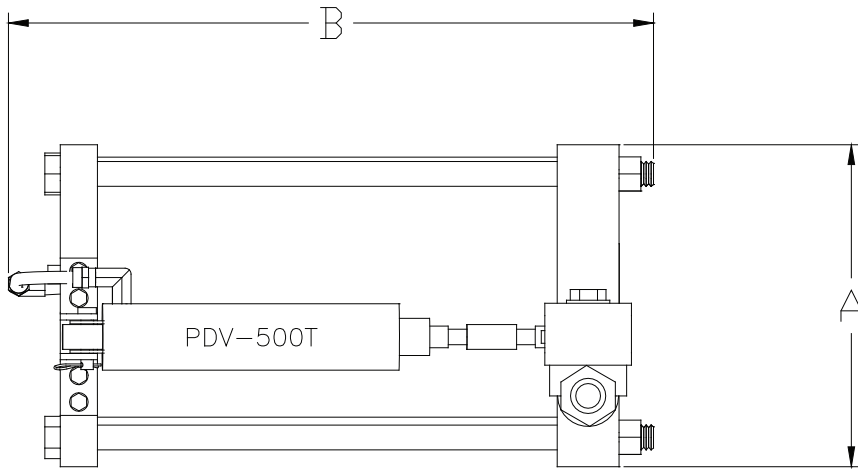

2950 Mechanic Street, Lake City, PA 16423, USA | Toll Free Phone 800-840-9906 | Corporate Fax 814-774-0778 | Order Entry Fax 814-774-3482

Distributed By:



---

## PDV Series - PDF Downloads

---


### Installation, Operation and Maintenance Manuals

---

PDV-500T



PDV-500T-Spare Parts



### Sales Drawings

---

PDV-500Ta

