



# WERTHER INTERNATIONAL INC.

DISTRIBUTED BY: AIR & VACUUM PROCESS, INC.

TEL. 281-866-9700

FAX. 281-866-9717

SALES@AIRVACUUMPROCESS.COM

## OIL-LESS STRAIGHT PISTON AIR COMPRESSOR PC2/50

ISO 9001-2008  
Certified




ISO 13485-2008  
Certified



- Completely Oil-Less operation
- Specialty Niploid Coated cylinder and high temperature piston rings for Long Service Life
- 100% Duty Cycle, Runs continuously
- Ease of Maintenance
- ASME rated air tank, internally & externally coated to prevent corrosion
- Optional self regenerative dessicant air dryer
- Integrated Aftercooler
- 5 micron particle filters with autodrain
- Optional Silencing Cabinet 56 dB/A
- Equipped with ASME rated safety valve, pressure regulator, gauges and line ball valve resulting in a complete turn key compressor station
- Long Service Life backed by a twelve month warranty and dedicated tech support

HP	1.5
Output Free Air	6.35 CFM
Output Free Air	180 L. Min
Max Pressure PSI	116 PSI
Max Pressure Bar	8 bar
Max Current 115V	17 Amps
Max Current 220V	7 Amps

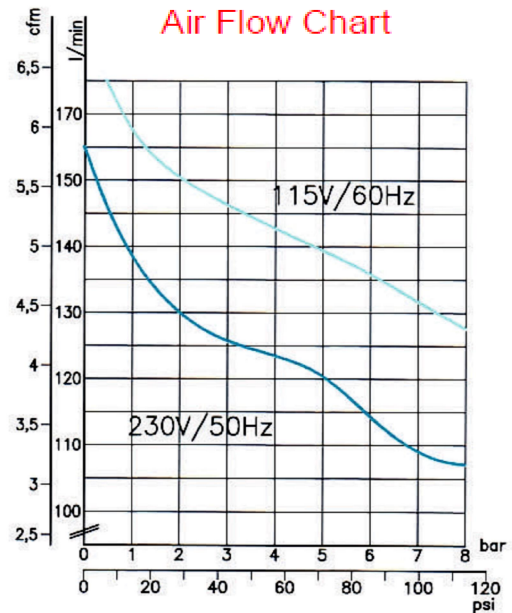

**Please factor 20% air-flow reduction for 50hz applications**

**THE PC2 QUIET OIL LESS COMPRESSOR IS AVAILABLE IN MULTIPLE CONFIGURATIONS TO SUIT YOUR NEEDS. FOR A DETAILED VIEW OF DIFFERENT CONFIGURATIONS, PLEASE CONSULT PAGE TWO OF THIS BROCHURE.**



# WERTHER INTERNATIONAL INC.

DISTRIBUTED BY: AIR & VACUUM PROCESS, INC.

TEL. 281-866-9700

FAX. 281-866-9717

SALES@AIRVACUUMPROCESS.COM

## OIL-LESS STRAIGHT PISTON AIR COMPRESSOR PC2/50

### PC 2/50/3 Compressor + Air Receiver

- ITEM # M57090US – 115V/60 HZ
- ITEM # M57020US – 220V/60 HZ
- ITEM # M57010 – 220V/50 HZ

Noise Level 72 dB/A  
 Tank Size 13gal(50L)  
 Dimensions (in.) 25L x 18W x 29H  
 Weight 97 Lbs



### PC 2/50/37D Compressor + Air Receiver + Dryer

- ITEM # M57291 – 115V/60 HZ
- ITEM # M57220US – 220V/60 HZ
- ITEM # M57211 – 220V/50 HZ

Noise Level 72dB  
 Tank Size 13gal(50L)  
 Dimensions (in.) 25L x 22W x 29H  
 Weight 141 Lbs



### PC2/50/379D Compressor + Air Receiver + Dryer + Silencing Cabinet

- ITEM # M57490US – 115V/60 HZ
- ITEM # M57420 – 220V/60 HZ
- ITEM # M57411 – 220V/50 HZ
- ITEM # M57391 – 115V/60 HZ (WITH DRYER)
- ITEM # M57321 – 220V/60HZ (WITH DRYER)
- ITEM # M57311 – 220V/50HZ (WITH DRYER)

Noise Level 56 dB/A  
 Tank Size 13 gal (50L)  
 Dimensions (in.) 29L x 23W x 32H  
 Weight 207 lbs



\*Silencing Cabinet cannot be purchased separately

DISTRIBUTED BY: AIR & VACUUM PROCESS, INC.

TEL. 281-866-9700 FAX. 281-866-9717

SALES@AIRVACUUMPROCESS.COM