

## WERTHER INTERNATIONAL INC.

DISTRIBUTED BY: AIR & VACUUM PROCESS, INC. TEL. 866-660-0208 FAX. 281-866-9717 SALES@AIRVACUUMPROCESS.COM

### **OIL-LESS STRAIGHT PISTON AIR COMPRESSOR**

Certified

PC3/50

ISO 9001-2008 Certified








- Completely Oil-Less operation
- Specialty Niploid Coated cylinder and high temperature piston rings for Long Service Life
- 100% Duty Cycle, Runs continuously
- Ease of Maintenance
- ASME rated air tank, internally & externally coated to prevent corrosion
- Optional self regenerative dessicant air dryer
- Integrated Aftercooler
- 5 micron particle filters with autodrain
- Optional Silencing Cabinet 58 dB/A
- Equipped with ASME rated safety valve, pressure regulator, gauges and line ball valve resulting in a complete turn key compressor station
- Long Service Life backed by a twelve month warranty and dedicated tech support

HP	2
Output Free Air	8.54 CFM
Output Free Air	242 L. Min
Max Pressure PSI	116 PSI
Max Pressure Bar	8 bar
Max Current 220V	10 Amps

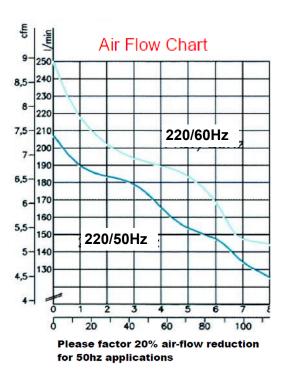

THE PC3 QUIET OIL LESS COMPRESSOR IS AVAILABLE IN MULTIPLE CONFIGURATIONS TO SUIT YOUR NEEDS. FOR A DETAILED VIEW OF DIFFERENT CONFIGURATIONS, PLEASE CONSULT PAGE TWO OF THIS **BROCHURE.** 









## WERTHER INTERNATIONAL INC.

DISTRIBUTED BY: AIR & VACUUM PROCESS, INC. TEL. 866-660-0208 FAX. 281-866-9717 SALES@AIRVACUUMPROCESS.COM

### OIL-LESS STRAIGHT PISTON AIR COMPRESSOR

# PC3/50

### PC 3/50/3 Compressor + Air Receiver

<b>ITEM # M58020US</b>	-220V/60 HZ
ITEM # M58011	-220V/50 HZ

Noise Level Tank Size Dimensions (in.) Weight 74 dB/A 13gal(50L) 25L x 18W x 29H 106 lbs





### PC 3/50/37D Compressor + Air Receiver + Dryer

ITEM # M58221 - 220V/60 HZ ITEM # M58211 - 220V/50 HZ

Noise Level Tank Size Dimensions (in.) Weight 74 dB 13 gal (50L) 25L x 22W x 29H 128 lbs

### PC 3/50/379D Compressor + Air Receiver + Dryer + Silencing Cabinet

ITEM # M58420US - 220V/60 HZ ITEM # M58411 - 220V/50 HZ ITEM # M58321 - 220V/60 HZ (WITH DRYER) ITEM # M58312 - 220V/50 HZ (WITH DRYER)

Noise Level Tank Size Dimensions (in.) Weight

58 dB/A 13 gal (50L) 29L x 23W x 32H 216 lbs



\*Silencing Cabinet cannot be purchased separately

DISTRIBUTED BY: AIR & VACUUM PROCESS, INC. TEL. 281-866-9700 FAX. 281-866-9717 SALES@AIRVACUUMPROCESS.COM